



WaStop® Inline Check Valve Technical Specification Stainless Steel AISI 304/316


| | | | |
|----------------------|---|------------------|------------------|
| Model no.: | WS230-S2-304/316 | WS230-S3-304/316 | WS230-S4-304/316 |
| Nominal Size: | 250 mm | | |
| Pipe: | Stainless Steel AISI 304/316 | | |
| Membrane: | Polyurethane | | |
| Fasteners: | Marine grade stainless steel (AISI 316) | | |

| Technical data: | Soft (S2) | Standard (S3) | Hard (S4) |
|-------------------------------|--------------------------|--------------------------|--------------------------|
| Max. back pressure*: | 3 mH ₂ O | 5 mH ₂ O | 8 mH ₂ O |
| Horizontal opening pressure*: | 182 mmH ₂ O | 213** mmH ₂ O | 258** mmH ₂ O |
| Horizontal closing pressure*: | 111 mmH ₂ O | 128** mmH ₂ O | 147** mmH ₂ O |
| Submerged opening pressure*: | 96** mmH ₂ O | 110** mmH ₂ O | 123** mmH ₂ O |
| Submerged closing pressure*: | 44** mmH ₂ O | 50** mmH ₂ O | 56** mmH ₂ O |
| Vertical opening pressure*: | 288 mmH ₂ O | 320** mmH ₂ O | 352** mmH ₂ O |
| Vertical closing pressure*: | 168** mmH ₂ O | 186** mmH ₂ O | 205** mmH ₂ O |

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (16-20°C).

| Max Flow | m/s | l/s |
|----------|-----|-----|
| | 2 | 100 |

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 2 m/s

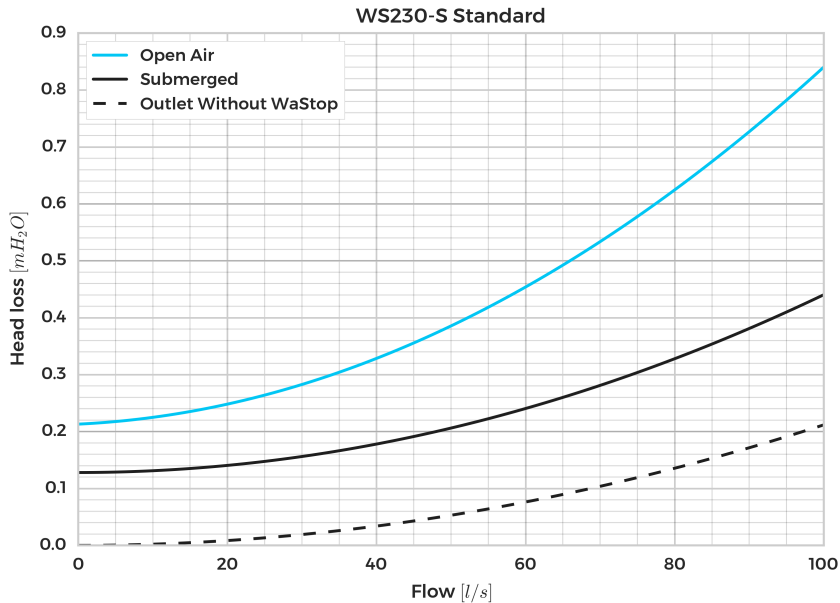

In the submerged case opening pressure [mmH₂O /inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Postal address
 Wapro AB
 Munkahusvägen 103
 SE-374 31 Karlshamn
 SWEDEN

Tel: +46 454 185 10
 Fax: +46 454 123 38
 email: wapro@wapro.se
 Website: www.wapro.se

Reg.nr: 556352-1466
 Registered office:
 Karlshamn, Sweden
 VAT nr: SE 556 352 146604

HOLDING BACK
THE FLOOD