



## WaStop® Inline Check Valve Technical Specification PVC


<b>Model no.:</b>	WS200PVC-S2	WS200PVC-S3	WS200PVC-S4
<b>Nominal Size:</b>	8		
<b>Pipe:</b>	PVC		
<b>Membrane:</b>	Silicone		
<b>Fasteners:</b>	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	9,8 ft H <sub>2</sub> O	16,4 ft H <sub>2</sub> O	26,2 ft H <sub>2</sub> O
Horizontal opening pressure*:	6,3 in H <sub>2</sub> O	7,1** in H <sub>2</sub> O	7,9** in H <sub>2</sub> O
Horizontal closing pressure*:	3,7 in H <sub>2</sub> O	3,5** in H <sub>2</sub> O	3,9** in H <sub>2</sub> O
Submerged opening pressure*:	4,5** in H <sub>2</sub> O	5,1** in H <sub>2</sub> O	5,7** in H <sub>2</sub> O
Submerged closing pressure*:	0,8** in H <sub>2</sub> O	1** in H <sub>2</sub> O	1,4** in H <sub>2</sub> O
Vertical opening pressure*:	9,8** in H <sub>2</sub> O	11** in H <sub>2</sub> O	12** in H <sub>2</sub> O
Vertical closing pressure*:	5,3** in H <sub>2</sub> O	5,9** in H <sub>2</sub> O	5,9** in H <sub>2</sub> O

- \*) +/- 15% \*\*) Modeled value  
- Values measured from bottom of pipe.  
- Tests performed at room temperature (61-68°F).

Max Flow	f/s	GPM
	7	1015

- Higher flows requires custom valve, contact Wapro  
- Flange installation is highly recommended at flows above 6.5 f/s

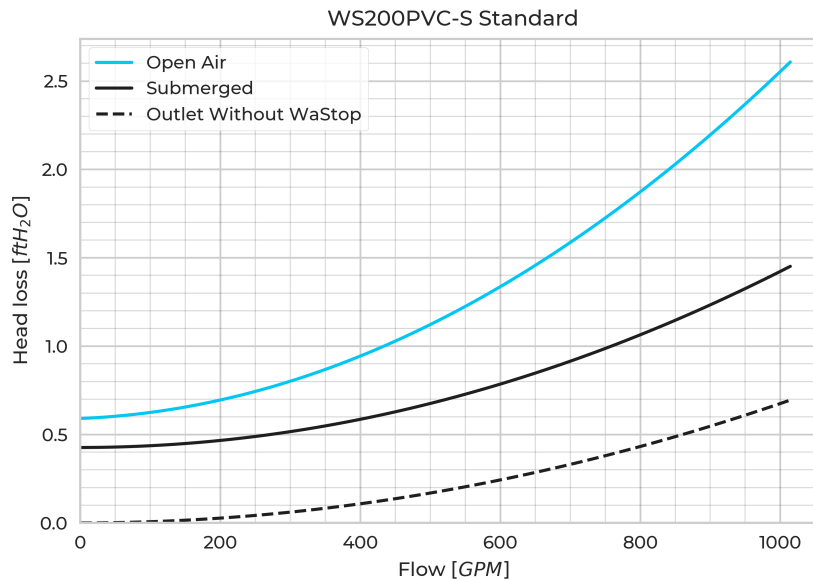

In the submerged case opening pressure [mmH<sub>2</sub>O / inH<sub>2</sub>O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Postal address  
Wapro AB  
Munkahusvägen 103  
SE-374 31 Karlshamn  
SWEDEN

Tel: +46 454 185 10  
Fax: +46 454 123 38  
email: [wapro@wapro.se](mailto:wapro@wapro.se)  
Website: [www.wapro.se](http://www.wapro.se)

Reg.nr: 556352-1466  
Registered office:  
Karlshamn, Sweden  
VAT nr: SE 556 352 146604

HOLDING BACK  
THE FLOOD