



WaStop® Inline Check Valve Technical Specification PE


Model no.:	N/A	WS250PE-I-S3	N/A
Nominal Size:	10		
Pipe:	PE		
Membrane:	Polyurethane		
Fasteners:	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	9,8 ft H ₂ O	16,4 ft H ₂ O	26,2 ft H ₂ O
Horizontal opening pressure*:	7,3 in H ₂ O	8,5** in H ₂ O	9,4** in H ₂ O
Horizontal closing pressure*:	4,7 in H ₂ O	5,5** in H ₂ O	6,1** in H ₂ O
Submerged opening pressure*:	5,3** in H ₂ O	6,1** in H ₂ O	6,9** in H ₂ O
Submerged closing pressure*:	1,4** in H ₂ O	1,6** in H ₂ O	2** in H ₂ O
Vertical opening pressure*:	11,4** in H ₂ O	12,6** in H ₂ O	13,9** in H ₂ O
Vertical closing pressure*:	6,7** in H ₂ O	7,3** in H ₂ O	7,3** in H ₂ O

- *) +/- 15% **) Modeled value
- Values measured from bottom of pipe.
- Tests performed at room temperature (61-68°F).

Max Flow	f/s	GPM
	7	1585

- Higher flows requires custom valve, contact Wapro
- Flange installation is highly recommended at flows above 6.5 f/s

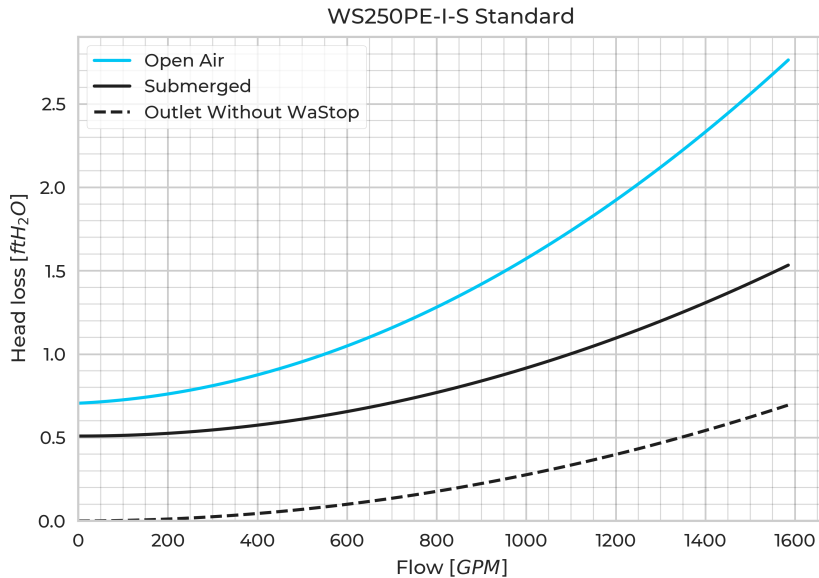

In the submerged case opening pressure [mmH₂O / inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Postal address
Wapro AB
Munkahusvägen 103
SE-374 31 Karlshamn
SWEDEN

Tel: +46 454 185 10
Fax: +46 454 123 38
email: wapro@wapro.se
Website: www.wapro.se

Reg.nr: 556352-1466
Registered office:
Karlshamn, Sweden
VAT nr: SE 556 352 146604

HOLDING BACK
THE FLOOD