



WaStop® Inline Check Valve Technical Specification Stainless Steel AISI 304/316


Model no.:	N/A	WS1040-S3-304/316	WS1040-S4-304/316
Nominal Size:	42		
Pipe:	Stainless Steel AISI 304/316		
Membrane:	Polyurethane		
Fasteners:	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	N/A ft H ₂ O	16,4 ft H ₂ O	N/A ft H ₂ O
Horizontal opening pressure*:	N/A in H ₂ O	18,5** in H ₂ O	20,7** in H ₂ O
Horizontal closing pressure*:	N/A in H ₂ O	11,8** in H ₂ O	13,2** in H ₂ O
Submerged opening pressure*:	N/A** in H ₂ O	10,4** in H ₂ O	11,8** in H ₂ O
Submerged closing pressure*:	N/A** in H ₂ O	3,5** in H ₂ O	4,5** in H ₂ O
Vertical opening pressure*:	N/A** in H ₂ O	23,8** in H ₂ O	22,4** in H ₂ O
Vertical closing pressure*:	N/A** in H ₂ O	14,8** in H ₂ O	14,8** in H ₂ O

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (61-68°F).

Max Flow	f/s	GPM
	13	54905

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 6.5 f/s

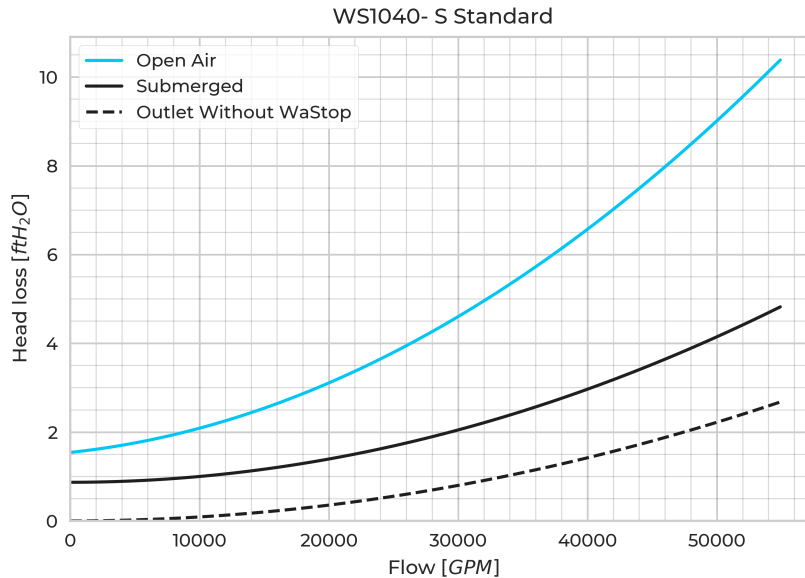

In the submerged case opening pressure [mmH₂O /inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Postal address
 Wapro AB
 Munkahusvägen 103
 SE-374 31 Karlshamn
 SWEDEN

Tel: +46 454 185 10
 Fax: +46 454 123 38
 email: wapro@wapro.se
 Website: www.wapro.se

Reg.nr: 556352-1466
 Registered office:
 Karlshamn, Sweden
 VAT nr: SE 556 352 146604

HOLDING BACK
THE FLOOD